

# The Highly Efficient Fischer Panda® 8 Mini Digital Panel AC Marine Generator

Fischer Panda Generators are the ideal choice for the professional sailor or power boater. **When space is tight, weight is critical or noise is an issue, many boaters choose Fischer Panda.** The highly efficient Fischer Panda 8 Mini Digital Panel AC (50Hz) marine generator is powered by the reliable freshwater-cooled twin cylinder Kubota diesel engine and our superior asynchronous water-cooled alternator.

All Fischer Panda generators come standard with 100% freshwater cooling, superior sound enclosure, bulkhead external connections, remote fuel lift pump and remote-control panel. Depending upon the kilowatt size Fischer Panda Generators can weigh up to 50% less than a conventional generator and are up to 30% smaller in size.



## Fischer Panda®



SMALL



LIGHT



QUIET

351 S. Andrews Ave., Pompano Beach, FL 33069

**Call (800) 508-6494**

Visit us at [www.fischerpanda.com](http://www.fischerpanda.com)

or e-mail us at [sales@fischerpanda.com](mailto:sales@fischerpanda.com)



### FEATURES INCLUDE:

- Advanced digital control panel provides extensive performance and diagnostic data
- Less weight, size and noise
- Extremely quiet (52dba@7meter)
- Safety shutdowns for all critical functions
- Self-protected against overload
- VCS electronic governor provides excellent voltage stability
- Direct driven fresh water-cooled Asynchronous Alternator
- Ignition protection for gas powered boats
- Gear driven raw water pump
- Robust twin cylinder Kubota diesel engine
- Comes complete with harnesses, remote-control panel, sound enclosure and remote fuel lift pump
- 5 Year limited warranty





# Fischer Panda® 8 Mini-Digital Panel Specifications (50Hz)

Frequency (Hz)	50
Voltage (V)	230
Current Max. (Amp)	29
Peak Output (kW)	6.8
Continuous Output (kW)	6.1
Engine Type	Kubota Z482
Cylinder/Hp	2 cyl/13.3
Displacement	479 ccm/29.23 cu.in.
Cooling	Heat Exchanger
Noise Level dBa @ 7 meters	52
Length Inches	23
Width Inches	17
Height Inches	22
Weight (Wet) lbs.	350

Rev. 01/15/2025. Fischer Panda Generator is standard with a sound shield.

## Remote Digital Panel

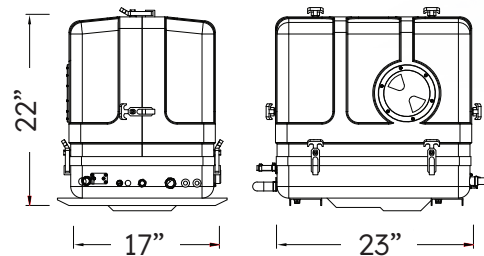

## OPTIONAL ACCESSORIES

**External Soft Motor Mounts**  
External Soft Motor Mounts for extra smooth operation.




**Vented Loop**  
(anti-siphon valve) Recommended for all installations. Prevents water from siphoning back to the engine and minimizes potential electrolysis. Made with a stainless-steel tube and nylon valve for long life and easy service.



**Gas Separator**  
Exhaust water separator provides very low back pressure and extra quiet exhaust noise.



**Low Profile Muffler**  
Low inlet muffler for installations where the muffler cannot be installed lower than the genset.

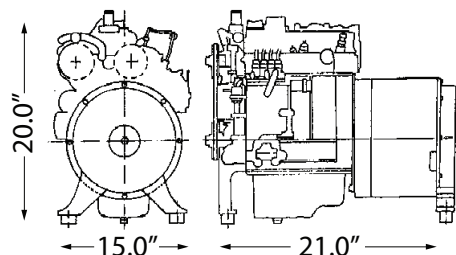

**Fischer Panda®**

351 S. Andrews Ave., Pompano Beach, FL 33069

**Call (800) 508-6494**

Visit us at [www.fischerpanda.com](http://www.fischerpanda.com)  
or e-mail us at [sales@fischerpanda.com](mailto:sales@fischerpanda.com)

