

FISCHER PANDA® RV4 AC

Diesel Inverter Generator



FischerPanda®
RV POWER SYSTEMS

Quiet, diesel generator system engineered for reliable onboard RV power.



DIGITAL POWER MANAGEMENT

- Advanced digital control system
- Real-time system monitoring
- Operational status alerts



RV INTEGRATION

- Compact installation footprint
- Designed for OEM and retrofit applications
- Sound-shielded enclosure
- Utilizes chassis tank as fuel source



RELIABLE PERFORMANCE

- Pure sine wave AC output
- Engine speed optimization
- Built-in diagnostics
- Data logging capability



DESIGNED FOR RV APPLICATIONS

Water-Cooled Engine | Inverter-Quality AC Power | Kubota Diesel Engine | Compliant with EPA, CARB, & National Park Service noise requirements

FISCHER PANDA® RV4 AC



General Technical Data

Generator Type	Inverter Generator
Cooling System	Water-Cooled
Control System	Digital, IDA208
Operating Speed	Constant Speed (3,000 rpm)

Electrical System

Voltage (V)/Current (A)	122 / 32.8
Frequency (Hz)	60
Rated Output (kW)	4
Start Battery Voltage (VDC)	12 / 24

Engine

Manufacturer	Kubota
Engine Model	Z482 / Diesel
Number of Cylinders	2
Displacement	29.2 in ³
Starting System	Electric
Compliant with EPA, CARB, & National Park Service noise requirements	Yes


Dimensions & Weight

Length (in)	30
Width (in)	17.5
Height (in)	18
Weight	
Generator Set (lb)	345
Inverter (lb)	14.8


Operating Conditions

Operating Altitude	10,000 ft (3% de-rate per 1,000 ft)
Operating Temperature	Up to 120°F (5% de-rate per 10°F above 90°F)
Noise Level	72 dBA @ 10 ft 60 dBA @ 50 ft (half load)

Technical Drawings

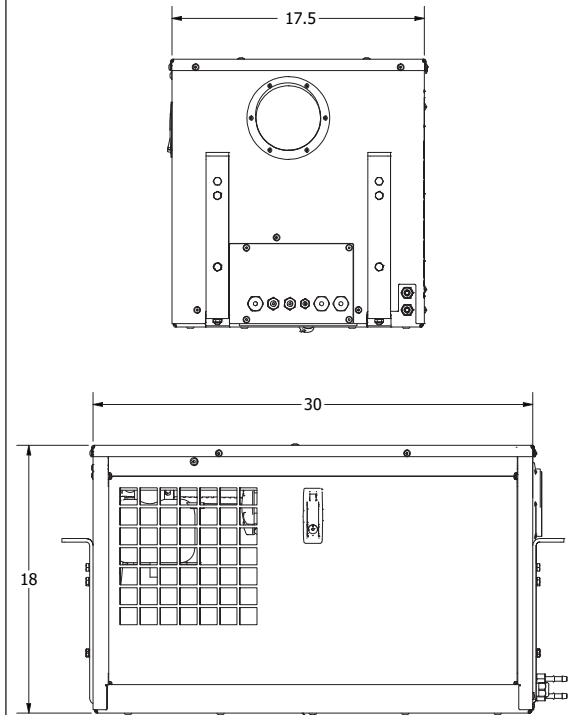

STANDARD ACCESSORIES



Remote
digital
panel



Inverter

OPTIONAL ACCESSORIES



Soft
motor
mounts



Tail
pipe

351 S. Andrews Ave., Pompano Beach, FL 33069
(800) 508-6494 | www.fischerpanda.com
sales@fischerpanda.com

> LEARN MORE



Product Information
Specifications, features &
support resources



Dealer Locator
Find sales & service
locations